

MANUAL 2 SIDED VERTICALLY PIVOTING



These TÜV and VdS-certified manual barriers are positioned on a base on both sides of the doorway (left and right).

The barriers are equipped with a hinge that allows them to be manually positioned either vertically or horizontally. In the horizontal position, the barriers are secured at the center of the doorway to the floor with a quick-lock tensioner.

Unlocking the tensioner and returning the barriers to their vertical position is also done manually. The barriers are held in the vertical position by a locking mechanism.

STANDARD DIMENSIONS


- barrier height: 10 to 100 cm
- door or gate opening: 200 to 1200 cm
- other dimensions available on request

STANDARD FEATURES

- locking mechanism with quick-lock tensioner
- color: RAL 3000 red

RESPONSIBILITY OF THE CUSTOMER

- sufficient space on the left and right sides of the barrier

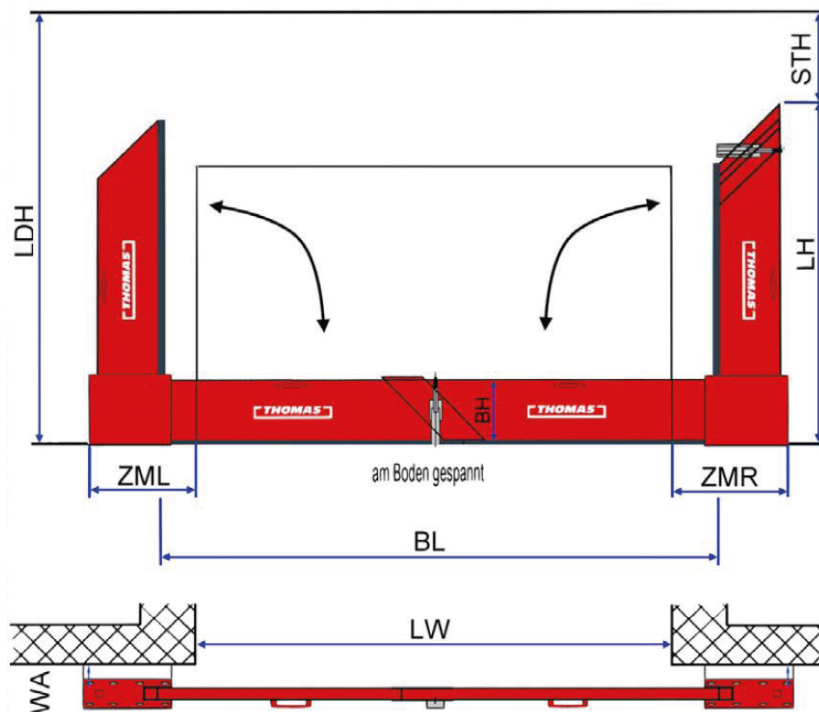

- LW** - clear opening
- LH** - required height
- BH** - barrier height
- BL** - barrier length
- ZML** - required space on the left
- ZMR** - required space on the right
- WA** - distance to the wall
(≥ 100 mm)



Arbeitsschutzmanagement
SCC
• Gefährdungsidentifikation
und -analyse
• Risikobewertung
• Prävention
ID 15 106 12125
www.tuev-thueringen.de

