

## MANUAL VERTICALLY PIVOTING



This TÜV and VdS-certified manual liquid barrier features a barrier mounted on a base on one side of the door or gate opening. On the opposite side, a U-profile with a tensioner is installed.

The barrier is equipped with a hinge, allowing it to be manually placed in either a vertical or horizontal position. In the horizontal position, it is secured using a tensioner located on the receiving side.

Unlocking the tensioner and returning the barrier to its vertical position is also done manually. The barrier is held in its vertical position by a locking mechanism.

## STANDARD DIMENSIONS

- barrier height: 10 to 100 cm
- door or gate opening: 50 to 600 cm
- other dimensions available on request

## STANDARD FEATURES


- locking mechanism with a quick-lock tensioner
- color: RAL 3000 red

## RESPONSIBILITY OF THE CUSTOMER

- sufficient space on the left and right sides of the barrier

## OPTIONS

- material choice in galvanized steel or stainless steel
- weight compensation
- chemically resistant PTFE sealing
- impact protection

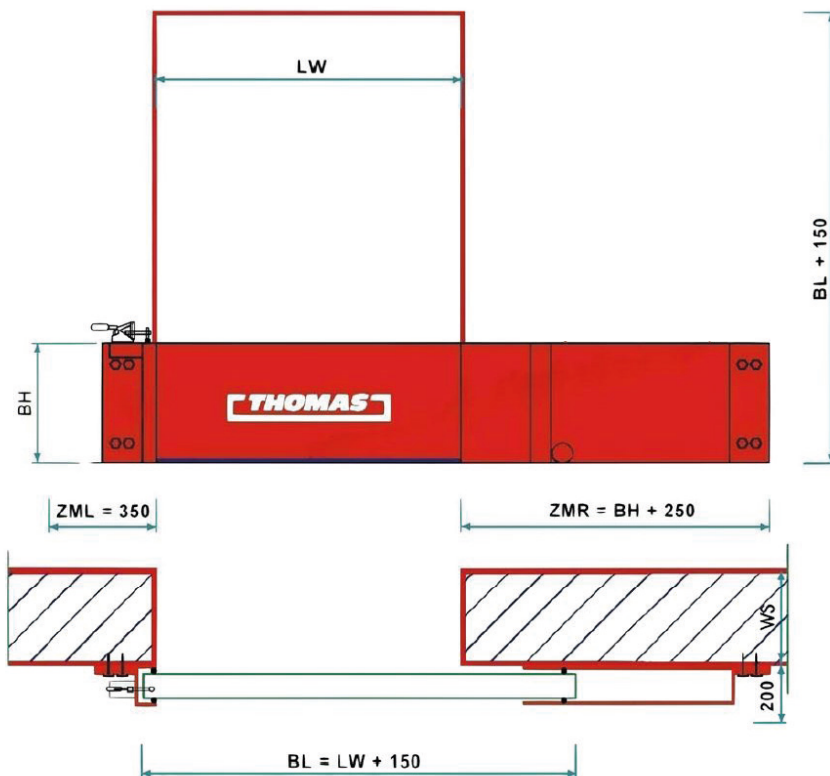

**ZML** - required space on the left  
**ZMR** - required space on the right  
**BH** - barrier height  
**LW** - clear opening  
**BL** - barrier length



Arbeitsschutzmanagement  
 SCC  
 • Gefährdungsidentifikation  
 und -analyse  
 • Risikobewertung  
 • Prävention  
 ID 15 106 12125  
 www.tuev-thueringen.de

