



This TÜV and VdS-certified barrier rests above the door or gate opening when not in use. The barrier is manually operated via a chain and moves up and down within two U-shaped guides on either side of the passage. A counterweight provides weight compensation.

When the barrier is in the horizontal closed position, it is secured and sealed watertight with two quick-lock tensioners.

Unlocking the tensioners and returning the barrier to its resting position is also performed manually.

STANDARD DIMENSIONS

- barrier height: 10 to 100 cm
- door or gate opening: 50 to 600 cm other dimensions available on request

STANDARD FEATURES


- weight compensation via counterweight
- locking mechanism with quick-lock tensioners
- color: RAL 3000 red

RESPONSIBILITY OF THE CUSTOMER

- sufficient space on the left and right sides of the barrier

OPTIONS

- material choice in galvanized steel or stainless steel
- chemically resistant PTFE sealing
- impact protection

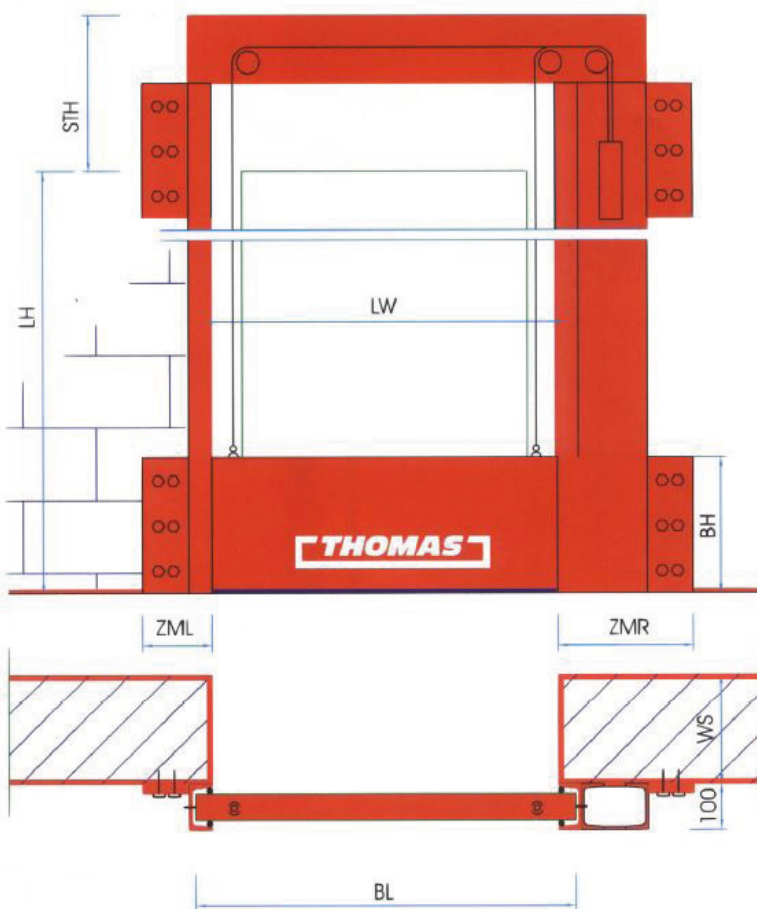

- ZML** - required space on the left
- ZMR** - required space on the right
- BH** - barrier height
- BL** - barrier length
- LW** - clear opening
- LH** - free height
- STH** - required height (BH + 300 mm)
- WS** - wall thickness



Arbeitsschutzmanagement
SCC
• Gefährdungsidentifikation
und -analyse
• Risikobewertung
• Prävention
ID 15 106 12125
www.tuev-thueringen.de

